

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
26 May 2005 (26.05.2005)


PCT

(10) International Publication Number
WO 2005/047156 A1

- (51) International Patent Classification⁷: **B65H 75/22**, E21B 19/22
- (21) International Application Number: PCT/NO2004/000334
- (22) International Filing Date: 5 November 2004 (05.11.2004)
- (25) Filing Language: Norwegian
- (26) Publication Language: English
- (30) Priority Data: 20035028 13 November 2003 (13.11.2003) NO
- (71) Applicant and
(72) Inventor: HOUEN, Terje, H. [NO/NO]; Ankerringen 15, N-4056 Tananger (NO).
- (74) Agent: HÅMSØ PATENTBYRÅ ANS; P.O. Box 171, N-4302 Sandnes (NO).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: A METHOD AND DEVICE FOR REEL TRANSPORT

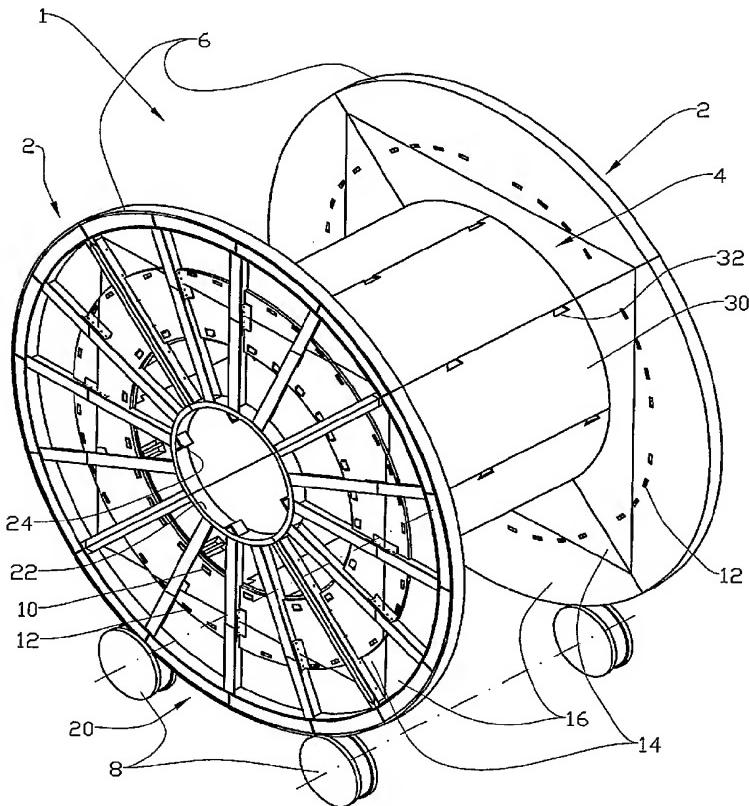

(57) Abstract: A reel device (1) where the reel (1) is constituted by separable components (14, 16, 30), and where the reel is arranged especially to be used in transport and storage of long, coilable bodies, or optionally assembled bodies, wherein cylinder segments (30) of the reel (1) can be connected to end flanges (2, 2') of the reel (1) at more than one radial distance from the central axis of the reel (1).

WO 2005/047156 A1



Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.